


Clip wedge anchor fittings

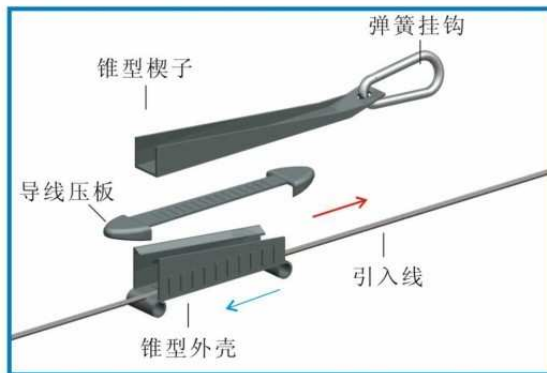

Introduction

the two covered wire cable to connect directly with the anchor Remarks: suitable for all installation sites. Operating essentials: the Self-covered wire cable wire directly from the plate passes under, or within the first shell into the cone, then add the wire plate (cover covered wire cable) and the tapered wedge, with the wedge on the spring hook on the anchor fixed see Snap and then holding the two tapered conical shell body relaxed state, while the other hand to straighten the laying of the covered wire cable, cone shell reverse driving force to clamp material covered wire cable. When removing a wedge can relax when you hit the cone.